

NASA TECH BRIEF

Marshall Space Flight Center



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Laser-Actuated Holographic Storage Device

The problem:

The automatic selection of one out of thousands of pages in a holographic memory system is a formidable task. The attempts that have been made to fabricate high-vacuum tubes which would use photoemitted electrons, to selectively heat desired holographic locations, have failed because of cesium contamination of the storage device.

The solution:

A new laser-actuated storage device permits the automatic selection of holographic pages by using a laser beam.

How it's done:

The operation of the laser-actuated storage device is as follows. Constant power is applied to the conducting ground plane through a dc current between points A and B (see Figure 1). A uniform charge distribution is maintained over a useful portion of the storage medium through a corona-discharge chamber. In the presence of the uniform and continuous corona-discharge stream, the constant power bias is of sufficient magnitude to maintain the laser-actuated holographic storage device, at a temperature just below the thermal threshold of the storage medium.

The laser beam then is addressed to the desired location; absorption of the beam by the light-absorbing film increases the temperature locally at the desired holographic page address. The additional temperature increment causes the temperature to increase beyond the threshold of the storage medium; and a hologram is either written or erased, depending upon the specifics of a laser-beam modulation (see Figure 2). For example, if a deformable media such as microcrystalline wax is used, then the bias temperature T_0 would be as shown. In the figure, the temperature T_0 lies just below the temperature beyond which an abrupt change in viscosity

occurs. It is desirable to bias thermally the laser-actuated device as close as possible to the "knee" of the viscosity-versus-temperature curve. In this manner, the temperature change (ΔT) necessary to effect an adequate viscosity reduction during the writing or erasing of a hologram, is held to a minimum. Since the laser beam supplies the energy requisite to the temperature change, a small temperature change means less energy is required from the laser.

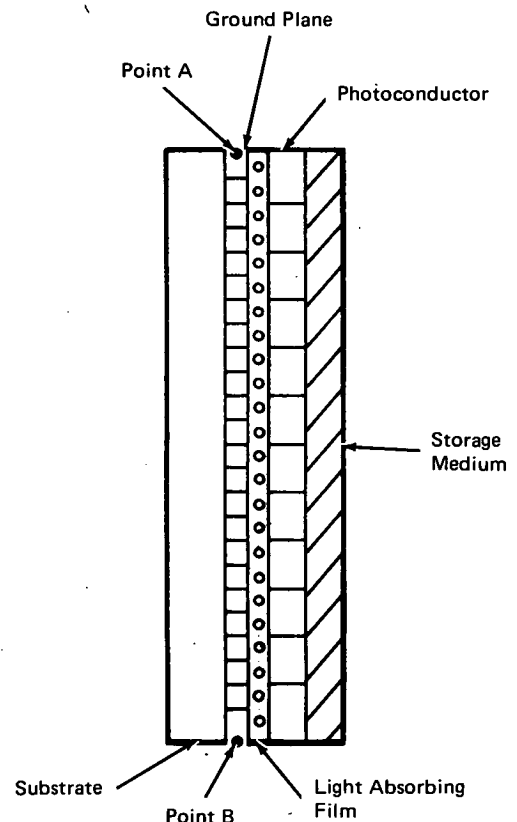


Figure 1. Laser-Actuated Storage Device

(continued overleaf)

